

## BIOGAS FROM PAPER AND DECOMPOSABLE KITCHEN WASTE

**Nikhil kumar Singh, Raju kumar Sharma, Nitish kumar**

*Department of Civil Engineering  
IIMT College of Engineering, Greater Noida U.P (India)*

*Under the esteemed guidance of **Mr. Satish sir**  
Professor of Civil Engg. Department*

**Abstract**— Bio gas is a non conventional energy resource. Generation of Solid wastes in general and biodegradable waste in particular is increasing at house hold level over the last two decades. Per capita generation of the waste has been increasing steadily due to population growth and changing socio-economic characteristics and cultural habits and varies from 250g to 600g. Any material which can be decomposable by the action of microorganisms in a short period of time is called biodegradable. Mostly food waste; vegetable peels and fruit pulp are biodegradable. These materials readily mix with the soil by the action of bacteria. During decomposition, these materials release carbon dioxide, methane, ammonia and hydrogen sulphide into the environment thereby contributes to air pollution and odour pollution. The gases that are released during the decay of biodegradable wastes can be captured for the economic utility and as well as to save the environment. An attempt is being made in this technical research paper to demonstrate the possibilities energy recovery from biodegradable kitchen waste that is collected from residential societies which can be utilized for the benefits of the society. Kitchen and food waste collected from a high end residential community of 300 families in Mumbai city suburbs is analyzed for the quantification of bio gas. Bio gas is captured through a fabricated anaerobic digester. Experimentation and results are discussed. The results are encouraging.

**Keywords**—*paper waste , Biodegradable Kitchen and Food Waste; Bio gas from Food Waste.*

## I. INTRODUCTION

**Biogas** is the mixture of gases produced by the breakdown of organic matter in the absence of oxygen (anaerobically), primarily consisting of methane and carbon dioxide. **Biogas** can be produced from raw materials such as agricultural waste, manure, municipal waste, plant material, sewage, green waste or food waste. Biogas is a renewable energy source. In India it is also known as Gobar gas. Biogas is produced by anaerobic digestion with methanogen or anaerobic organism, which digests material inside a closed system, or fermentation of biodegradable material. This closed system is called an anaerobic digester, biodigester or a bioreactor. Biogas is primarily methane ( $\text{CH}_4$ ) and carbon dioxide ( $\text{CO}_2$ ) and many have small amount of hydrogen sulfide ( $\text{H}_2\text{S}$ ), moisture and siloxanes. The gases methane, hydrogen, and carbon monoxide ( $\text{CO}$ ) can be combusted or oxidized with oxygen. This energy release allows biogas to be used as a fuel; it can be used for any heating purpose, such as cooking. It can also be used in a gas engine to convert the energy in the gas into electricity and heat.

Decomposable waste is the waste that can be decomposed and will be broken down into carbon dioxide, water, methane or simple organic molecules by the action of micro-organisms in reasonably less time. These wastes are generated out of human and industrial economic activity and the sources could be the residential areas, commercial areas and industrial areas. Characteristics of these wastes vary depending upon its source of generation. The composition of the waste varies from urban to rural and also from community to community due to their socio-economic

—cultural and living conditions. Normally biodegradable wastes are food and kitchen waste, manure, agricultural and forestry waste, paper waste, and textiles. For the disposal of wastes different disposal methods are available and there is a need to select eco-friendly options to save the environment and natural resources.

**Solid waste** generated from the residential communities and also out of food processing, commercial and agricultural activity contains significant organic matter which is of biodegradable nature. The per capita waste generation rate in India has increased from 0.44 kg/day in 2001 to 0.6 kg/day in 2011. The reasons for the increase in solid wastes are by changing lifestyles and increased purchasing power of urban Indians. There are 53 cities that generate 86,000 TPD (31.5 million tons per year) of MSW at a per capita waste generation

rate of 500 grams/day (Annepu, 2012[1]). Non availability of data and also inconsistency in available data on solid wastes are the major hurdle while studying the solid waste management process among Indian cities. At present more than 32% of country's population is living urban areas and wastes generated in 366 Indian cities contribute 70% of solid waste from India's urban population. Estimations made by different agencies and institutions reported that the total MSW generated in urban India at 68.8 million tons per year (TPY) or 188,500 tons per day (TPD). The data collected indicate a 50% increase in MSW generated within a decade since 2001. In a "business as usual scenario", urban India will generate 160.5 million TPY (440,000 TPD) by 2041, in the next decade, urban India will generate a total of 920 million tons of municipal solid waste that needs to be properly managed in order to avoid further deterioration of public health, air, water and land resources, and the quality of life in Indian cities[2]. Also from the studies conducted and also analysis of solid waste samples collected from different cities across the country in India

## Types of Solid Waste

It can be classified into different types depending on their source:

- **Municipal Solid Waste (MSW):** It consists of household waste, construction and demolition debris (CnD), sanitation residue, and waste from streets, generated mainly from residential and commercial complexes. As per the MoEF it includes commercial and residential waste generated in municipal or notified areas in either solid or semi-solid form excluding industrial hazardous wastes but including treated bio-medical wastes;
- **Industrial Solid Waste (ISW):** In a majority of cases it is termed as hazardous waste as they may contain toxic substances, are corrosive, highly inflammable, or react when exposed to certain things e.g. gases.
- **Biomedical waste or hospital waste:** It is usually infectious waste that may include waste like sharps, soiled waste, disposables, anatomical waste, cultures, discarded medicines, chemical wastes, etc., usually in the form of disposable syringes, swabs, bandages, body fluids, human excreta, etc. These can be a serious threat to human health if not managed in a scientific and discriminate manner.

## **Item that can be put in the container for biodegradable kitchen waste**

- Vegitable and fruit waste of different types (fruit, vegetable and peelings)
- Eggshells and coffee sediments,
- Tea and coffee filter bags,
- Trainted food
- Non liquid cooked food waste ,bones
- Stale bread and biscuit.
- Tissues ,paper towels and paper sacks

## **Items that cannot be put in the container for biodegradable kitchen waste**

- green garden waste (grass,leaves,branches,hedges)
- oils and fats
- liquid food waste
- cigarette ends
- napkins and sanitary towels
- textile ,leather,cork
- ashes
- hazardous waste
- packaging waste

In the present scenario our country is facing various problems which will become more serious in coming years. Demand of petroleum products is increasing, India has been spending a big budget for importing these products and on the other hand our country faces serious problems like environmental pollution, disturbance in weather & global warming . One of the main environmental problems of today's society is the continuously increasing production of organic wastes. In many countries, sustainable waste management as well as waste prevention and reduction have become major political priorities, representing an important share of the common efforts to reduce pollution and greenhouse gas emissions and to mitigate global climate changes . Uncontrolled waste dumping is no longer acceptable today and even controlled landfill disposal and incineration of organic wastes are not considered optimal practices, as environmental standards hereof are increasingly stricter and energy recovery and recycling of nutrients and organic matter is aimed .

The main aim of this research work is to setup biogas digester to produce biogas by using cow dung, waste food, Vegetable market waste & poultry dropping as biomass and monitoring the

characteristics of influent, effluent, gas production and utilizing this data for biogas digester design.

## II. EXPERIMENTAL SET UP & INSTRUMENTATION:

A 20 litre capacity aspirator bottle was used as a digester. The small opening provided in the aspirator bottle was used as the inlet for the digester. The inlet was fitted with a small glass tube which was connected to the gas measuring cylinder with the help of rubber tube.

The gas collection units consist of a 1.5L capacity graduated cylinder, which was interconnected with anaerobic digester, as shown in Figure. This gas collecting cylinder is initially filled with water. As the gas gets produced in the anaerobic digester, it enters the cylinder by displacing the water. The gas collection is measured with the help of graduated cylinder.

### 2.1 Startup

Initially, the anaerobic digester was fed with cow dung, 338 gms of potato was chopped into small fragments and then fed into digester as a source of cellulose. The requirements of material are as follows:-

- 1) Waste Food           =70%
- 2) Cow Dung           = 20%
- 3) Paper Waste         =10%

Total weight of waste material used for digestion was 13 kg out of which waste food was 9.1 kg, market waste was 1.3kg, and cow dung as 2.6 kg. After adding water to prepare slurry, the total weight of material as 15.5kg. Urea and Superphosphate 1-2 gm. was added to the digester as an activator [1,11]. Heating arrangement was also made to maintain the temperature in the digester

Municipal Solid Waste (MSW) is defined as any waste generated by household, commercial and/or institutional activities and is not hazardous [1]. With rapid urbanization, the quantities of municipal solid waste, an important by-product of an urban lifestyle, is increasing at a rate faster than urbanization itself. In India, ten years ago, there were 2.9 billion urban residents, each generating 0.64 kg/capita/day of MSW. Today, there are about 3 billion residents generating 1.2 kg/capita/day. It is estimated that by 2025, these numbers will increase to 4.3 billion urban residents with 1.42 kg/capita/day of MSW [2]. Waste generation is directly related to the economy of a country. There can be variations in the generation rates within a country, and even within the same city. Industrial countries account for a large portion of the world's MSW relative to their share of world population, while developing countries give a large portion of MSW relative to their share of world income. Classification of the regions of the world based on their affluence provides a more organized outlook to waste

**Aim:** The aim of the study is to convert paper and decomposable kitchen waste into bio-gas. To convert biodegradable kitchen waste into biogas.

**Objectives:**

To produce a renewable bio energy from kitchen waste.

To reduce air pollution.

To find ecofriendly disposal methods

To generate revenue from the waste that is generation of wealth from the waste.

To reduce global warming.

Biogas refers to a gas made from anaerobic digestion of kitchen waste. Methane is a clean gas which generates energy and one of the main constituent of cooking gas. Abundant kitchen waste (biomass) in terms vegetable peelings, kitchen waste, food waste are abundantly available from the each and every house of Indian communities. These kitchen waste biomass mass can be a source for Methane production where combination of waste treatment and energy production would be an advantage. In this connection many researches carried studies and investigations for the generation of bio gas the Methane from



biodegradable waste.

Hilkiah Igoni[1] (2008) studied the Effect of Total Solids concentration of Municipal Solid Waste on the Biogas Produced in an Anaerobic Continuous Digester. The total solids (TS) concentration of the waste influences the pH, temperature and effectiveness of the microorganisms in the decomposition process. They investigated various concentrations of the TS of MSW in an anaerobic continuously stirred tank reactor (CSTR) and the corresponding. Shalini sing, sushil kumar, M.C. Jain, Dinesh kumar (2000), [2] carried studies on cattle dung and their residues insemination with kitchen waste and found that the increased biogas production using microbial

stimulants. Ranjeet Singh, S. K. et.al [3]collected inoculfrom four different sources such as Jajmau tannery waste treatment plant (ITW), Jajmau municipal waste treatment (IMW), Unnao distillery (IDW) and batch reactor and carried studies for the generation of waste. Jong Won Kang et al (2010) [4]studied the On-site Removal of H<sub>2</sub>S from Biogas Produced by Food Waste using an Aerobic Sludge Bio filter for Steam Reforming Processing. They show that a bio filter containing immobilized aerobic sludge was successfully adapted for the removal of H<sub>2</sub>S and CO<sub>2</sub> from the biogas produced using food waste. Abhishek et.al (2015)[5] carried research on production of bio-gas from the food and degradable waste. Leta Deressa etal (2015)[6] analysed the production of bio gas from fruit and vegetable waste mixed with cow dung in anaerobic digester Sudha.G.et.al, 2012[7] published a paper titled “Production of biogas from different fruit pulp”. Anaerobic digestion process was adopted to convert the biodegradable fruit pulp into biogas. It was observed that the more the Chemical Oxygen Demand (COD) in fruit pulp, the more is the biogas. COD value is directly proportional to biogas production.

### III. RELEVANCE

Kitchen waste is organic material having the high calorific value and nutritive value to microbes, that's why efficiency of methane production can be increased by several order of magnitude, using higher efficiency and size of reactor. The bio gas used can be used for cooking and lighting purposes. And also on large scale generation the cost of biogas production is reduced. Also in most of cities and places, residential communities, hostels of university campuses, agricultural market yards, fruits and vegetable market huge amounts of bio degradable wastes are generated and are being disposed on to the landfill or discarded

in open dumping yards. The traditional methods of bio degradable wastes results in public health hazards and diseases like malaria, cholera, typhoid. Inadequate management of wastes like uncontrolled dumping bears several adverse consequences: It not only leads to polluting surface and groundwater through leachate and further promotes the breeding of flies , mosquitoes, rats and other disease bearing vectors. Also, it emits unpleasant odour & methane which is a major greenhouse gas contributing to global warming. Hence forth the kitchen waste can be used as a raw material to produce biogas. The produced biogas can be used as a cooking gas in the kitchen. This concept is energy from waste.

#### IV. BENEFITS OF BIO GAS TECHNOLOGY

Production of energy.

Transformation of organic wastes to very high quality fertilizer.

Improvement of hygienic conditions through reduction of pathogens.

Environmental advantages through protection of soil, water, air etc.

Micro-economic benefits by energy and fertilizer substitutes.

Macro-economic benefits through decentralizes energy generation and environmental protection.

**Slurry preparation tank:** The kitchen waste is made into slurry with 45-50% solids. Initially 10% cow dung is required. At a later stage it can be reduced to 5%. The process is a batch process. Each batch can be retained for 4 days in the digester.

**Digester** A digester is a huge vessel where chemical or biological reactions are carried out. Anaerobic digestion is a series of processes in which microorganisms break down biodegradable material in the absence of oxygen. It is used for industrial or domestic purposes to manage waste and/or to release energy. The digestion process begins with tank



## V. MATERIALS AND METHODS

The bio degradable waste materials used for the demonstrative study are vegetable peelings, fruit peelings, food waste collected from the residential housing societies. In Dadar Nagar, Kandivili East at Radha Residence CHS there are about 300 families with a population of about more than 1200 people are living. From the house hold survey and from the society office registers it has been revealed that on an average 400 kg of exclusive organic waste is collected from house to house. The kitchen waste has been used for the demonstration of the experiment. For the demonstration, the technology used Appropriate Rural Technology of India, Pune (2003) has been used. At developed a compact biogas plant which uses waste food rather than any cow dung as feedstock, to supply biogas for cooking. The plant is sufficiently compact to be used by urban households. The design and development of this simple in this the bio gas plan uses waste grain flour, spoilt grain, overripe or misshapen fruit, nonedible seeds, and fruits.

Yet powerful technology for the people, has won By the Ashden Award for sustainable Energy 2006 in the Food Security category. Dr. AnandKarve developed a compact biogas system that uses starchy or sugary feedstock and rhizomes, green leaves, kitchen waste, leftover food, etc. Just 2 kg of such feedstock produces about 500 g of methane, and the reaction is completed with 24 hours.

For the generation of the bio-gas an anaerobic digester is fabricated to convert paper & decomposable kitchen waste (DKW) into biogas. The digester can be a hard plastic tank or iron The volume of the tank is designed based on the quantity of DKW produced per day. Cow dung or animal dung is added initially to introduce anaerobic bacteria into the digester. A Non-return valve (NRV) is fitted to both inlet and outlet pipes of the digester.

bacterial hydrolysis of the input materials to break down insoluble organic polymers, such as carbohydrates, and make them available for other bacteria. Acidogenic bacteria then convert the sugars and amino acids into carbon dioxide, hydrogen, ammonia, and organic acids. Acetogenic bacteria then convert these resulting organic acids into acetic acid, along with additional ammonia, hydrogen, and carbon dioxide. Finally, methanogens convert these products to methane and carbon dioxide. The digester is made up of fiber material like

a plastic tank or steel tank. **Valves:** A valve is a device that regulates, directs or controls the flow of a fluid (gases, liquids, fluidized solids, or slurries) by opening, closing, or partially obstructing various passageways. In an open valve, fluid flows in a direction from higher pressure to lower pressure. The ball screw valve is made by plastic material.

**drGas Purifier** The gas produced from digester consists of carbon dioxide, hydrogen sulphide and methane. The removal of both H<sub>2</sub>S and CO<sub>2</sub> can be done by passing it through water. This simple process is used to produce a pure methane gas.

**Pressure Gauge** Many techniques have been developed for the measurement of pressure and vacuum. Instruments used to measure pressure are called pressure gauges or vacuum gauges. The pressure gauge is a device used to measure the pressure inside the digester. The pipe lines are made up of PVC (polyvinyl chloride). It's used to flow the waste crushed food into the digester and also to flow the gas from digester to gas purifier. The anaerobic digester develop in the pilot study is shown in the line diagram in figure-1 below.

## Process flow sheet

1. Slurry preparation tank
2. Anaerobic digester
3. Methane gas collection tank
4. Sludge collect

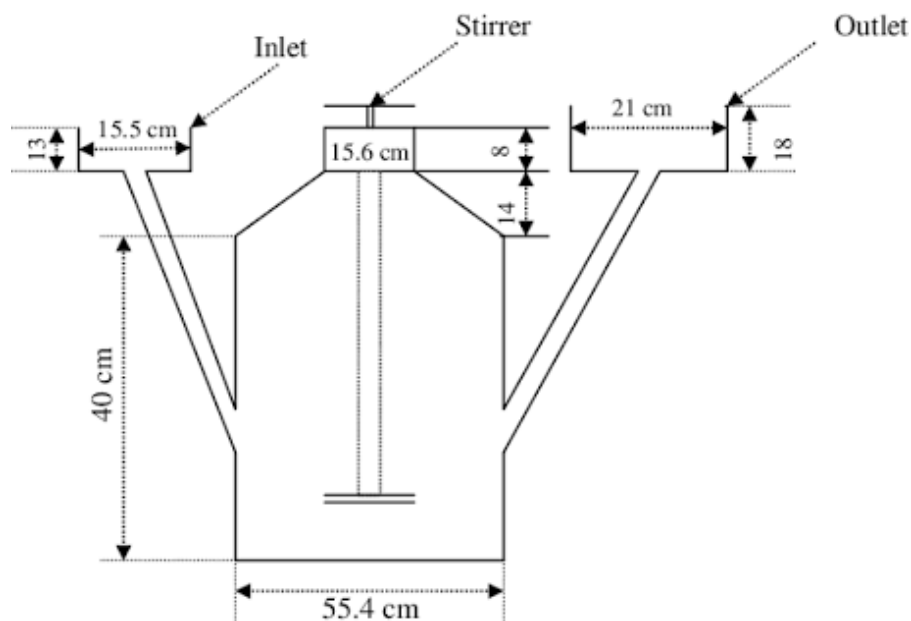


Fig.1: Schematic diagram of bio-digester

## VI. EXPERIMENTAL PROCEDURE

The fresh kitchen waste consisting of fruit pulp, vegetable peeling and food waste is mixed with cow dung and water to prepare slurry. The ratios are 40% kitchen waste plus 10% cow dung and 50% water. The slurry was pumped into an anaerobic digester tank. The tank was thermally insulated and was provided with a low speed agitator that worked continuously; under mesophilic conditions (38 C). This slurry was transferred into the anaerobic digestion tank and retained nearly for 96 hours. After 96 hours of maturation time due to micro bacterial actions and anaerobic digestion in the absence of oxygen different gases such as Methane, Ammonia, Carbon dioxide and sulphur dioxide are generated. Methane gas was collected in a separate gas collection tank. The sludge from the anaerobic digester is collected in a sludge collection tank, which can be used as a bio-fertilizer.

### • DESCRIPTION OF METHOD

The Decomposable kitchen waste (DKW) & Paper Waste is made into slurry by adding suitable quantity of water. The slurry is introduced into the anaerobic digester through the inlet pipe. Nearly 10-kilogramme cow dung slurry is passed into the digester. The microorganisms decompose DKW into Carbon dioxide and methane. The methane gas is collected in a storage tank through the outlet pipe.

Paper + DKW + Cow dung + Water → Methane + Carbon dioxide + ammonia

## VII. RESULTS AND ANALYSIS

The percentage of methane varies from 65% to 69% and carbon dioxide varies from 15% to 25%. The remaining % is ammonia and hydrogen sulphide. The percentage of methane can be increased by decreasing the carbon dioxide percentage in the anaerobic digester.

Table.: Characteristics of kitchen waste

Sl.No	Description	g/Kg
4	aNHp4-N	<0.2

## VIII. CONCLUSIONS

The gap between demand and supply for energy sources can be reduced by converting Bio degradable kitchen waste into a biogas. It is a source of renewable green energy. The biogas can be used as a cooking gas and also can be used in turbine to generate electricity. The left over sludge can be packed and used as a manure and compost for agriculture forming. There is need, further to investigate the cost economics and utility returns to establish the plant and running the unit for 365 day a year at residential community level.

## REFERENCES

- 1 National Bio-Energy Board, National Master Plan for Development of Waste to Energy in India, MWH Publication, PP 1-10 ,2009
- 2 JNNURM 2005 Report for Urban Development ( 2005) [www.karmayog.com](http://www.karmayog.com)
- 3 Ramshera trimurti (2012) 1 Sustainable Solid Waste Management in India. Thesis report for the award of Master of Science in Earth Resourcesl Engineering, Foundation School of Engineering and Applied Science Columbia University in the City of New York January 10, 2012.
- 4 Akolkar, A.B. (2005). Status of Solid Waste Management in India, Implementation Status of Municipal Solid Wastes, Management and Handling Rules 2000, Central Pollution Control Board, New Delhi
- 5 Karve .A.D. (2007), Compact biogas plant, a low cost digester for biogas from waste starch. <http://www.arti-india.org>
- 6 Karve of mumbai A.D (2006). Compact biogas plant compact low-cost digester from waste starch. [www.bioenergylists.org](http://www.bioenergylists.org).
- 7 Ranjeet Singh, S. K. Mandal, V. K. Jain (2008), Developmet of mixed inoculum for methane enriched biogas
- 8 Shalini Singh, Sushil Kumar, M.C. Jain, Dinesh kumar (2000), the increased biogas production using microbial stimulants. Indian Academy of Sciences.78 (3), pp.313-316.