

# Emotional Analysis Using FastText and RNN Variants for Amazon and Other E-commerce's Online Review with Support NLP

Afzal Beg<sup>1</sup>, Dr.Chinmay Bhatt<sup>2</sup>

<sup>1</sup>Ph.D. Scholar, Dept. of Computer Science

Sarvepalli Radhakrishnan University, Bhopal, M.P.

<sup>2</sup>Assistant Professor, Dept. of Computer Science

Sarvepalli Radhakrishnan University, Bhopal, M.P.

## ABSTRACT

Emotional analysis refers to the process of extracting content from a text that helps an entity understand the public feelings of its product or product while monitoring online conversations. E-commerce has seen tremendous growth in usage. There is a need to analyze the thousands of product reviews offered to customers to get an accurate view of customer needs and this will help analyze the market styles of any product. The purpose of this study is to explore different approaches to deep learning in an appropriate way Rate customer feedback based on mobile updates from Amazon.com based on measures analyze these reviews and classify them as good, bad, or neutral. In-depth learning algorithms are different Used and tested as simple, four-dimensional RNN, namely Long Short Term Memory Networks (LRNN). Short-Term Memory Network (GLRNN) is a recurring unit (GRNN), and a recurring unit (UGRNN). Five different algorithms have three modes for extracting features, with accuracy, memory, precision, and your F-1 score for both balance and balance data sets found an unequal set of data. It has been determined that GLRNN algorithms with the Quick Textfeature get high accuracy of 93.75%

**Keywords:** Emotional Analysis, Amazon and Other E-commerce, Product Reviews, FastText, Customer Feedback

## 1. INTRODUCTION

Thousands of people leave comments on products e-commerce sites (e.g. Amazon, eBay, Flipkart) and updates about services such as restaurants or places of interest (e.g. Travel Advisor, Rotten Tomatoes, and Yelp) and social almost non-existent media (for example, Facebook and Twitter) anything else. thus, sharing reviews and feedback from customers about products or services used online to influence the ideas of new customers in their products, services, organizations, or institutions. Generally, our views are on our behavior, ideas, and choicethe influence of other experiences and ideas. In particular, feedback or review when we encounter something new informed individuals is requested. (we dream millions part of users who share their knowledge with online updates about products and services; This will have a profound effect by encouraging or

discouraging other people it is very important to try these products or services. Verify the authenticity of the seller. Done Over time, consumers expand their ideas and feelings about the product invisible communities, social networks, and social media communities. Classification and division of adults the amount of random data from the internet is growing on a very challenging journey; so a feeling Analysis, as well as Indigenous Languages Processing (NLP) methods, are being developed to perform such tasks analysis of text data from reviews or surveys. (These methods predict the diversity of ideas (positive, negative, or neutral) best effect on the product. In this study, Emotional analysis will be performed for testing products on the website (i.e. unlocked cell phone) amazon.com Also; this analysis will help customers make the right decision to buy or not to buy. Also, companies can understand how their customers feel products and satisfaction levels to maintain a level of comfort, keeping their functionality as well improving their resources.

### **1.1. Problem Statement**

Use of the internet today has grown to the level of electronic trading websites where customers trust to buy and sell

- As these websites allow consumers to write their responses numerous reviews of different goods and services are now available.
- As a result, the need for analysis of these updates to understand feedback from consumers. it has been raised to both sellers and buyers. However, with so many comments it is hard to read all the answers to something, especially the famous objects.
- Will the study explore different emotions? Cellular data analytics methods reviews predict customer satisfaction mobile reviews using in-depth learning algorithms, including five different RNN models to be based on their performance. However, this will also help consumers make better decisions when considering a purchase of a specific cell phone.

### **1.2 Related Previous Work**

The internet has a huge impact on our daily lives. The Internet provides a wealth of information provides information on a variety of topics. Customers often check for updates before buying a product online. Millions of comments are made every day online about a product, person, or place number and size makes it very difficult to manage and analyze reviews. In the process of analyzing emotions, we draw attention to specific revisions using natural language analysis (NLP), integrated language learning, textual analysis, and differentiation of point of view. In the field of emotional analysis, there are many ways to solve NLP problems.

Garcia et al. has developed an agent-based model for the emotional analysis of product reviews [1]. In this way, the authors developed an agent-based model that uses a framework to reflect the emergence of cohesive emotions in online communities [2]. The framework modifies user interaction in online communities using two valences that describe happiness and awakening, which define the level of agency activity. In this way, the main focus of the authors was to balance the power of users and communities of product reviews. Santosh Kumar et

al. conducted a comparative study of other emotional analysis methods [3]. The authors found the Naive Bayes division work much better compared to SentiWord.Net and Logistic retreats. F1 score used to compare methods. Zhou et al. proposed a method based on a neural network of textual segregation called C-LSTM [4]. The authors describe a new method based on the neural network of emotional analysis. Haque et al. 10 vector support systems used for amazon review reviews were used [5]. A method similar to the one above was developed by Soliman et al. emotional analysis [6]. Vanja et al. suggested an emotional analysis based on e-commerce data visibility. The attribute removal in the aspect-level of product reviews is done by the authors. They compared the performance of SVM with the Naive Bayes and found that the latter was more accurate [7]. Wijayanto et al. use the Gaussian Naive Bayes in the emotional analysis [8]. Nithya et al. has proposed a way to conduct emotional analysis in random reviews [9]. They used TANAGRA software to differentiate. The authors explored 4 aspects, namely. Recommended way to find out which feature is most important and which is the smallest customer in the list of features of each of their products Display, Accessories, Battery life, weight, cell phone costs In this article, we have used the NLP library of Facebook FastText [10]. It is an open-source library. This library is specially designed for classification [11]. FastText is famous for its distributed representation. It is also used to embed words. The fasttext has some advantages over its peers in separating text and word placement. It trains models very quickly in comparison. The fasttext uses a hierarchical method that makes it very fast. It is a learning model of a monitored machine. Returns text and related tags of some kind and trains the model. This model also helps in separating the text.

### **1.3 Purpose and Scope of Work**

The paper aims to explore different models of in-depth reading measuring the polarity of text review for mobile phones From Amazon.com. Five different versions of RNN algorithms used RNN, LSTM-RNN, GLSTM-RNN, GRU-RNN, and UG-RNN and are compared in terms of three terms embedding extraction features: Glove, word2vec, and FastText. The placement of words plays a very important role in text fragmentation by converting text into displayed numbers presentations that allow us to use it as an input machine learning algorithm. E-commerce plays an important role in our daily lives. We are becoming more and more dependent on internet marketing to buy things. Thousands of comments are left on e-commerce sites every day. These updates provide valuable information about people's perceptions of the product. Therefore, it has become necessary to develop an appropriate approach to implementing and analyzing these updates to effectively and efficiently understands market trends and customer needs.

## **2. LITERATURE REVIEW**

On the other hand, in the field of emotional analysis, using in-depth learning methods, a comprehensive set of information 10,662 records were used to produce sensitivity analysis From the IMDb database [6] deep integration method unsupervised machine learning and learning Rewards provided better results and better analysis. alternatives available [3]. (in-depth reading feature Convolutional Neural Network (CNN) section, on the other hand, the machine learning aspect of the analysis used K unsupervised learning was used to train and

study CNN K-mean after data and output feature Integration algorithm used to classify updates good or bad collections.

### 3. METHODOLOGY

Methods and techniques used in this section, the division of mobile updates has also discussed the steps taken during the test are specified. Figure 1 shows the stages of this study starting Data set for online updates until each update is split good, bad, or neutral Pre-processing. (Previous processing methods are used Preparing the data to model and conclude very good result which includes issuing pre-processing steps Nulls, lowercase, spelling correction, token making, word order, punctuation, and punctuation. Each Update to the database is labeled based on the review ratings. If the rating is more than three stars, it will be labeled positive, if the ratio is equal to three stars, it is neutral, and anything less than three stars is considered negative. Also, the database is divided into 80% training and 20% test.

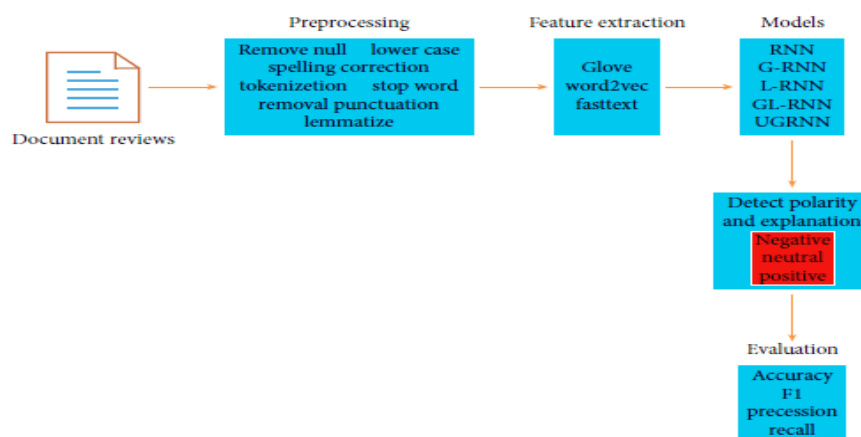


Figure 1: Categories of the proposed route

#### A. Data Collection

This section includes the compilation of a relevant database of emotional training analysis models. We have used the "Amazon Comments Sentiment Analysis" database, which is freely accessible at Kaggle.com. This database contains 3.6 million comments from amazon.com

#### B. Previous processing of data

This included the task of converting the database into the required format by removing any reuse from the database. This category includes functions such as case modification, word removal, punctuation, Stem focus, Lemmatization, POS tagging. Each update to the database is appropriately labeled according to its feelings (bad or good).

#### C. Feature Domain

This includes extracting the required information from pre-processed data to help classify the review as negative or positive. This was done using the fastest library.

## **D. Separation**

This step involves training the emotional analysis model using a quick text library. This model is further evaluated in comparison with the test data to ensure the accuracy of the model.

### **3.1. Types of Section Models**

#### **3.1.1. RNN Model**

Initially, we used the Camera library in-depth reading. We started setting some parameters for our RNN model. First, we applied the RNN layers. A dense network with 150 hidden units was used and then Softmax. Enabling function to predict 3 classes; in fact, Activation function Softmax determines the final classes. Here we keep a decrease of 0.2. We passed them all embedding types (Glove, word2vec, and FastText) vectors model and transfer them as a layer in a dense layer. In mathematics, also known as Softmax function  $\text{softmax}$ , or the standard interpreter function is a function that takes the vector of the real number  $K$  as the input again It is accustomed to the possible distribution of  $K$  Equal opportunities and input elements numbers. (meanwhile, before installing Softmax, some vectors parts can be worse or bigger than one, too not total in 1; but, after the use of Softmax, each component will be in width  $\{ \displaystyle (0, 1) \}$   $(0, 1)$ , and sections will be added up to 1 for interpretation as opportunities. In addition, large input components will go hand in hand with great potential. Softmax is commonly used on neural networks, to create an unusual exit map distribution of opportunities over predicted output from the network class. Additionally, we used anAdam optimizer to customize its model to determine the distance between the forecast and actual value. Adam optimizer calculates reading rate by distance. If the distance is large, the Adam optimizer will increase the level of learning. Finally, we spent 30 seasons' data.

#### **3.1.2. LSTM Based RNN (LRNN)**

In neural networks, Softmax is also an unusual networkoutput in distribution opportunities over limited output Class. We also tried to get in this way. Original text embedded in word2vec, Glove, and FastTextdata were trained 30 times in experimental use LSTM. The period is a defined hyperparameter before model training. One time, all data is transmitted both front and back via the neural network only once. Adam optimizer used to improve limits, reading rate 0.01 and bulk size is 32. A drop-out rate of 0.2 is set to prevent overcrowding it is in an LSM layer with 150 hidden units man a pattern of flexible learning levels. Individual accounts learning levels of various parameters comes the word the amount of time that corresponds to why it is named That Adam used the first and second measure to change the learning level of the weight of each neural network. In repair, refers to the amount of weight that is set for it such as "reading level" or step size.

#### **3.1.3. GRU Based RNN (GRNN)**

In this model, we use a GRU block cell to create a basic GRU with 150 hidden units this article, a cell with an output size of 100 and a pull rate of 0.2 received e-output is transmitted to RNN via a program. 62 and 31 lengths of training and test data, respectively. Finally all (Glove, word2vec, and FastText) embedding vectors in

the model, sequentially, as well are used interchangeably as they are placed in a dense layer ReLu activation function and output, Softmax classifier for the final emotional separation.

### 3.1.4. LSTM Based RNN (GLRNN) Group

Group LSTM RNN paper based on the effective LSM Group cell Size 150 and 0.2 drop point Group of LSTM cells contains a small LSTM cell for each group, in which each small cell operates in a sub-vector with the same output size. (Ku the output is transferred to RNN. Finally, a thick layer Included is the ReLu activation function; a Very high value of RELU the opening function commonly used in sensory networks; ReLU is usually a good first step output transferred in the Softmax separator for the final sensitivity. separation.

### 3.1.5. Update RNN-Based Gateway (UGRNN).

GRU-LSTM RNN-based use of your network structure for both LSTM cells with GRU used for 150 output size and a decrease of 0.2 cells is a combination of LSTM and GRU units, there is only one department here. to decide, to decide even if the unit needs a faster computer or compound, this is a repetitive concept feed-forward highway network output taken Switch to RNN with unit lengths 62 and 31 characters training and test data, respectively. In the end, the big one the layer is used with the function of activating the Relu as well output is transferred to the soft Softmax separator emotional separation.

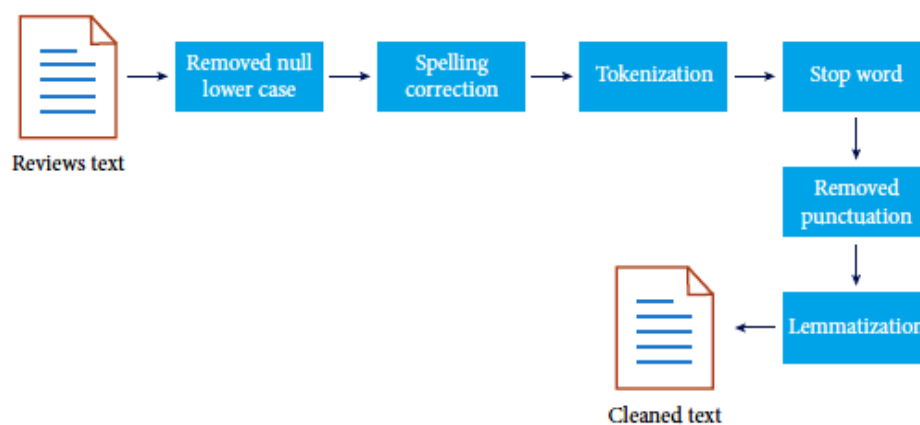


Figure 2: e- steps of the pre-processing

## 4. ANALYSIS AND RESULT

First, we identified and received a different test best model for measuring test polarity previous tests comparing the effectiveness of an engineering feature; for example, FastText, Glove, and word2vec use the jump gram for each model before making comparisons between models. and decide which method is best Veza. (Algorithms used in our experiments RNN, LRNN, GRNN, GLRNN, and UGRNN. However, all reviews are considered good in this article, negative or neutral based on the star rating (label). (We, four scales and five stars are classified as positive while two and one-star ratings are classified as: negative ratings, and three-star ratings are classified as neutral. (Ku The first tests were performed on unequal 4K data. comments (second analysis

estimates data means we have fixed the problem Unbalanced data set using a combination of two strategies: sub-samples and bulk samples.

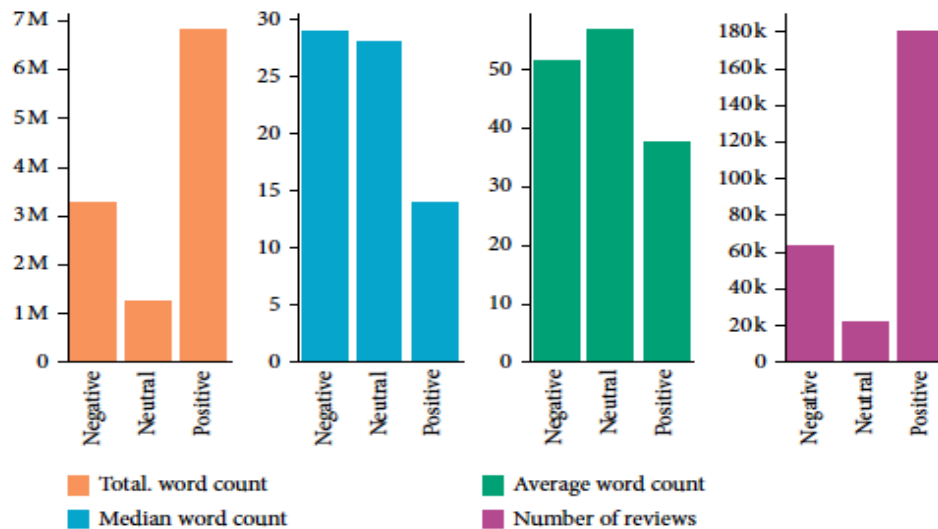


Figure 3: e- reviews summary statistics for positive, neutral, and negative rating

However, Oversampling was used to increase the size of unusual samples examples. Instead of throwing away a lot of examples, Unusual new events are created using repetition (done minority oversampling technique used in neutral reviews, the lower category contains Only 21,000 comments. Thus, we increase the size of the neutral Negative reviews by doing multiple samples to get 64165 reviews. Also, under-sampling was used to compensate data by reducing the size of the overflowing class method used when a data value is sufficient; As a result, we used smaller samples. Positive reviews because they were higher than negative and biased reviews. Note the number of positive comments. It was 18, 0686. Therefore, we are under a good review sample negative is equal to 64,165. Finally, balance the data collection contains each good, negative and neutral item it has 64,165 reviews. The balance of the balance sheet includes 192,495 reviews.

#### 4.1. Results from Unequal Data

Tables 1-5 represent Results for RNN GRU, LSTM, GLSTM, and UGRNN use a three-factor domain, respectively strategies. In five algorithms used in unequal systems in databases, it turns out that the GL-RNN algorithm has had a very good performance and very bad GRU-RNN. For this in the data set, GL-RNN and LSTM-RNN same performance; it may be related to their reality having the same structures. Usually, FastText name insertion where the feature output provides the highest accuracy compared to other methods of removal feature UG-RNN, Glove provides low accuracy in all tests algorithms high accuracy achieved FastTextFeature domain used in the RSTN-based LSTM group 93.75% accuracy low accuracy achieved Gloves Feature domain uses the GRU-RNN algorithm 53.87% accuracy. (in Glove Medium Accuracy, Word2vec and FastText feature

extraction features 75.1%, 82.6% and 83.7%, respectively. there is a limited Accuracy according to the 5 algorithms suggested in its unequal data, it is clear that FastText is working best and Glove.

#### 4.2. Results Received With Limited Data

From the beginning, if you look at the estimated data set, three ways to extract a feature with similar points. However, the maximum number of five proposed algorithms 88.39% accuracy was obtained. The LSTM-RNN algorithm uses the FastText feature way. Collect LSTM – RNN using FastText feature discharge was 0.01% different from the LSRM RNN algorithm; and, this is both algorithms share similar properties. Usually, glove the method had the highest accuracy among the four algorithms. However, it obtained very high scores used with the GRU-RNN algorithm. (e Glove, word2vec, and FastText download methods according to five algorithms 71.4%, 80.1%, and 79%, respectively. Ku as opposed to unequal data in which the accuracy is moderate. It was the highest value of the FastText method, balanced data had word2vec as the highest accuracy of the rating. Table 6-10 represents the results of the RNN GRU, Three LSTMs are used, and GLSTM and UGRNN respectively install removal method.

#### 4.3 Comparison

Comparing our work with other related research, in this paper, the results were obtained as follows. Previous analyzes were performed in different ways, discussed earlier in the literature [Chapter 2]. Various methods and algorithms for machine learning have been used in it.

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	71.88	67.98	71.87	67.23
<b>Glove</b>	68.45	59.33	68.84	61.22
<b>FastText</b>	75.89	54.12	75.15	74.10

Table 1: Results from the nonlinear data analysis of RNN An algorithm with three methods for extracting features

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	92.13	92.15	91.10	90.44
<b>Glove</b>	83.44	83.78	82.11	83.67
<b>FastText</b>	92.67	93.27	92.90	93.13

Table 2: Results from the nonlinear data analysis for LSTM Based on an RNN algorithm with three methods for extracting features.

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	65.89	49.34	65.45	56.20



<b>Glove</b>	53.77	29.77	53.98	37.90
<b>FastText</b>	70.67	63.45	70.44	65.33

Table 3: Results from the unlimited GRU data analysis Based on an RNN algorithm with three methods for extracting features

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	92.23	92.78	92.56	92.00
<b>Glove</b>	86.33	86.44	86.10	85.34
<b>FastText</b>	93.45	93.22	93.12	93.10

Table 4: Unequal data analysis results GLSTM-based RNN algorithm with three components methods

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	90.34	90.67	90.33	90.77
<b>Glove</b>	82.11	81.78	82.94	81.98
<b>FastText</b>	85.77	85.88	85.22	85.99

Table 5: Results from UGRU non-statistical data analysis Based on an RNN algorithm with three methods for extracting features.

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	77.34	06.45	77.23	11.98
<b>Glove</b>	62.77	58.33	62.58	59.44
<b>FastText</b>	70.33	59.55	70.44	63.90

Table 6: Results from the analysis of the RNN balance data an algorithm with three methods for extracting features.

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	87.33	87.56	86.55	87.33
<b>Glove</b>	69.44	63.56	69.70	63.98
<b>FastText</b>	88.99	88.46	87.33	88.34

Table 7: Results from the analysis of the balanced LSTM data Based on an RNN algorithm with three methods for extracting features.

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	61.77	66.55	61.47	58.44
<b>Glove</b>	66.44	71.33	66.45	70.23
<b>FastText</b>	61.55	66.77	61.44	58.89

Table 8: Results from the GRU Unbalanced Data Analysis RNN Based algorithm, with three methods for extracting features.

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	87.44	87.77	86.32	87.45
<b>Glove</b>	80.56	80.47	80.58	79.44
<b>FastText</b>	88.56	88.54	88.47	87.67

Table 9: Results from the GLSTM balance data analysis Based on an RNN algorithm with three methods for extracting features.

	Accuracy (%)	Precision (%)	Recall (%)	F1-score (%)
<b>Word2vec</b>	86.44	86.98	86.34	85.90
<b>Glove</b>	77.46	78.44	77.98	75.34
<b>FastText</b>	87.34	87.55	87.58	86.95

Table 10: Results obtained from balanced data analysis for UGRNN based RNN algorithm by the three feature extraction methods.

The same database used in this study of the three FastText feature domains depending on the survey used with the LSTM team based on the RNN method Maximum 93.75% accuracy (e work in [10] was able to Get 92.73% accuracy using the glove removal feature With CNN algorithm; However, the Glove feature provided the removal Severe side effects when used under RNN algorithms (Ku low accuracy obtained by heavy unigrams [4] Feature domain with accuracy under the SVM algorithm 81.2%. On the other hand, the study in [7] gets 90.7% accuracy using a continuous word bag on how to extract a feature under the random forest algorithm. Positive results are obtained recommended method, under the FastText asset domain GLRNN.

## 5. CONCLUSION

The most difficult part is text fragmentation because the meaning of the words should be understood when the ambiguity is removed looks at human language data displayed to gain a better understanding; processed afterward and is designed for use as an input into five different RNN algorithms. However, the data was processed for later processing limited data to solve the problem of having too many good reviews compared to neutral and bad. Otherwise, previous research has focused on unstable databases as well has been able to achieve good results. In five algorithms, GLSTM based RNN with FastText feature which can give the best results when tested in terms of accuracy, precision, memory, and F1 score of inequality LSTM – RNN also has data sets of 93.75% accuracy. FastText provided the best results in the form of a feature removal for a balanced database with an accuracy of 88.39%. The result can be drawn here that they get the highest points of sharing similar structures; but, on a set of measured data, There was a 0.01% difference between GLSTM and LSTM-RNN algorithms accuracy makes them very similar to this type of analysis (Ku Unlimited data set produced better results, probably because of its large size. (e results were compared with previous tests in books; As a result, the purpose of this article successfully achieved and all objectives achieved; and, a better model is built than the results to the reliability of previous tests with great accuracy The rate obtained using the glove removal feature is 92.75%. On the other hand, the Glove feature with the CNN algorithm extraction produced very low results when used with the RNN algorithm method of extracting a feature or machine learning cannot be individually tested emotional analysis; therefore, the algorithm needs to be adjusted to suit the situation Requirements, inputs, and output algorithm.

## ACKNOWLEDGEMENT

Many thanks to the College, and especially the Department of Computer Science for allowing us to do this research work that provided us with its resources.

## REFERENCES

- [1] Korovkinas, P. Deneznas and G. Garsva, "SVM and K-Means Hybrid Method for Textual Data Sensitivity Analysis," *Baltic Journal of Modern Computing*, vol. 7, no. 1 second. 47-60, 2019.
- [2] H.M. Kumar, B.S. Harish, and H.K. Philosophy, "Emotional Analysis of IMDb Movie Reviews Using a Mixed Element," *International Journal of Interactive Multimedia and Artificial Intelligence*, Vol. 5, no. 5, 2019.
- [3] B.S. Lakshmi, PS. Raj and R.R. Vikram, "Emotional Analysis Using CNN's In-Depth Reading Method with Chemins," *International Journal of Pure and Applied Mathematics*, vol. 114, no. 11 2, p. 47-57, 2017.
- [4] A.S. Rathore, A. Agarwal, and P. Dimri, "A Comparative Study of Mechanical Learning Methods for the Amazon Review," *Procida Computer Science*, Vol. 132, p. 1552-1561, 2018.
- [5] J. Sathasivam and R.B. Kalivardhan, "Emotional Analysis of Amazon Products Using Ensemble Machine Learning Algorithms," *International Journal of Mathematics, Engineering and Management Sciences*, Vol. 4, no. 2 H. 508-520, 2019.

- [6] K.Q.Anh, Y. Nagai, and L.M. Nguyen issue customer reviews on "online shopping and product design considerations," Vietnam Journal of Computer Science, vol. 6, no. 1 second. 43-56, 2019.
- [7] B Bansal and S Srivastava, "Emotional isolation of online consumer reviews using word vector representations," Procida Computer Science, Vol. 132, p. 1147-1153, 2018.
- [8] NM Ali, A. L. Hamid, M. Mustafa, and A. Yusuf, "Film sentiment analysis examines data sets using depth-reading models," International Journal of Mining Data and Information Management System (IJDMP), Volume. 9, no. 2/3, 2019.
- [9] G. Ju, Y. Meng, X. Qiu, Z.U, and X. Wu, "BiLSTM-Based Emotional Text Sentimental Analysis," IEEE Access, Vol. 7, p. 51522-51532, 2019.
- [10] Y. Zhang, MJ Er, R. Venkatesan, N, and M. Pratama, "Emotional isolation using repetitive attention-grabbing models", Proceedings of the 2016 International Joint Conference on Neural Networks (IJCNN), p. 1562-1569, Vancouver, BC, Canada, July 2016.
- [11] T. Mikolov, K. Chen, G. Corrado, and J. Dean, "An Effective Measure of Word Representation in Vector Spaces," arXiv Preprint arXiv: 1301.3781, 2013.
- [12] J. Pennington, R. Socher and CD Manning, "Gloves: Global Vectors for Representation," Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP), p. 1532-1543, Doha, Qatar, October 2014.
- [13] p. Bojanovsky, E. Grave, a. Joulin, and T. Mikolov, "Enriching vocabulary vectors with reduced vocabulary", Operations of the Association for Computational Linguistics, vol. 5, p. 135-146, 2017.
- [14] R. Fu, Z. Zhang, and L. Li, "Using LSTM network methods and GRU neural traffic flow forecasting", 2016 Procedures for the 31st China Automation Association (YAC) 31st Young Academician Annual Conference, p. 324-328, IEEE, Wuhan, China, November 2016.
- [15] J. Collins, J. Sohl-Dikstein and D. Susilo, "Strength and Training in Repetitive Neural Networks," Proceedings of ICLR 2017, Toulon, France, April 2017.
- [16] J. Q., X. Gu, and L. Zhang, "UGRNN are designed to predict short-term traffic flows through the establishment of multiple multi-featured programs," Proceedings of the 2018 International Information Networking Conference (ICOIN) In, p. 13-17, Chiang Mai, Thailand, January 2018.